





Flush Mount Amplifier

A0350

The A0350 flush mount amplifier can be used with Channel Vision's CAT5 audio hubs to provide a powerful 100 watts in the listening zone. Alternatively, the A0350 can be added to the SP525, SP650, and SP800 Free Standing Speakers to create a high-quality amplified speaker system.

Features

- 100 watt integrated class D amplifier
- Pre-amp audio outputs for easy connection to powered subwoofer
- Local audio input to override the CAT5 audio input
- Input for compatibility with Channel Vision's CAT5 audio systems

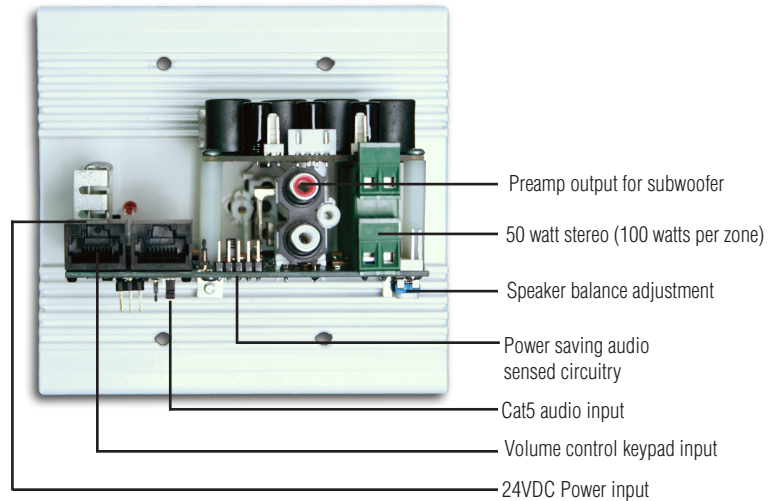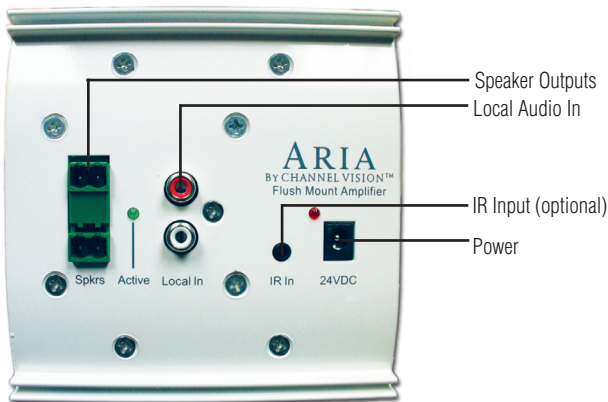

Specifications*

Amplifier:

- Power Input:** 24VDC
- Output Power:** 50 watts/ch RMS into 6 ohms @ <10% THD
- Frequency Response:** 20-20kHz (+/-3dB)
- Signal to Noise Ratio:** >85dB

- Input Sensitivity:** 500m VRMS
- Auto on Threshold:** 10m VRMS
- Storage Temperature:** -40 to +85° C
- Operating Temperature:** 0 to 55° C

*Specifications subject to change



Channel Vision Central
Structured Wiring



Channel Vision PRU
IR & Audio Equipment



ARIA™
Multi-Room Audio



Channel Vision Technology
Modulators, Cameras, Intercoms