

CRESCENDO™ By CHANNEL VISION™

High Powered CAT5 Audio System P-2044 4-Source/4-Zone CAT5 Audio Matrix

Channel Vision's P-2044, 4-source, 4-zone CAT5 Audio Matrix, functions as the heart of the 4-source Crescendo™ High Powered CAT5 Audio System. It allows up to four different sources to be played in four different zones simultaneously, making it perfect for families with a variety of listening interests. Controlling your music is easy with the P-2044's source specific IR repeating which allows independent control of identical source components. For example, two identical CD players can be controlled independently.

P-2044



Features:

- LED status indicators
- Source specific IR routing
- Input connections: RJ-45 or RCA
- Output connections: RJ-45 or 110 punchdown
- Compatible with Channel Vision's A0125 keypad
- Both RJ-45 and 110 punch down connectors for easy setup
- Mounts in structured wiring enclosures
- Easy-to-install

Specifications: (typical at 25° C)*

Power supply	18VDC, 1.0Amp	IR frequency range supported	30kHz - 56kHz
Cable requirements	CAT5 or better	IR sensor range (A0125)	40'@40kHz, 25'@56kHz
Speaker impedance (A0240)	6-8 Ohm	Operating temperature	-10°C to +50°C
Max audio input level	5 Vp-p	Dimensions	7"W x 6.5"H x 1.25"D
Audio frequency range	20Hz - 20kHz		


*Specifications subject to change without notice

CHANNEL VISION™

234 FISCHER AVENUE • COSTA MESA, CA 92626 USA
(714) 424-6500 □ (800) 840-0288 □ (714) 424-6510 fax
www.channelvision.com □ email: sales@channelvision.com

CRESCENDO™ By CHANNEL VISION™

High Powered CAT5 Audio System Typical Application

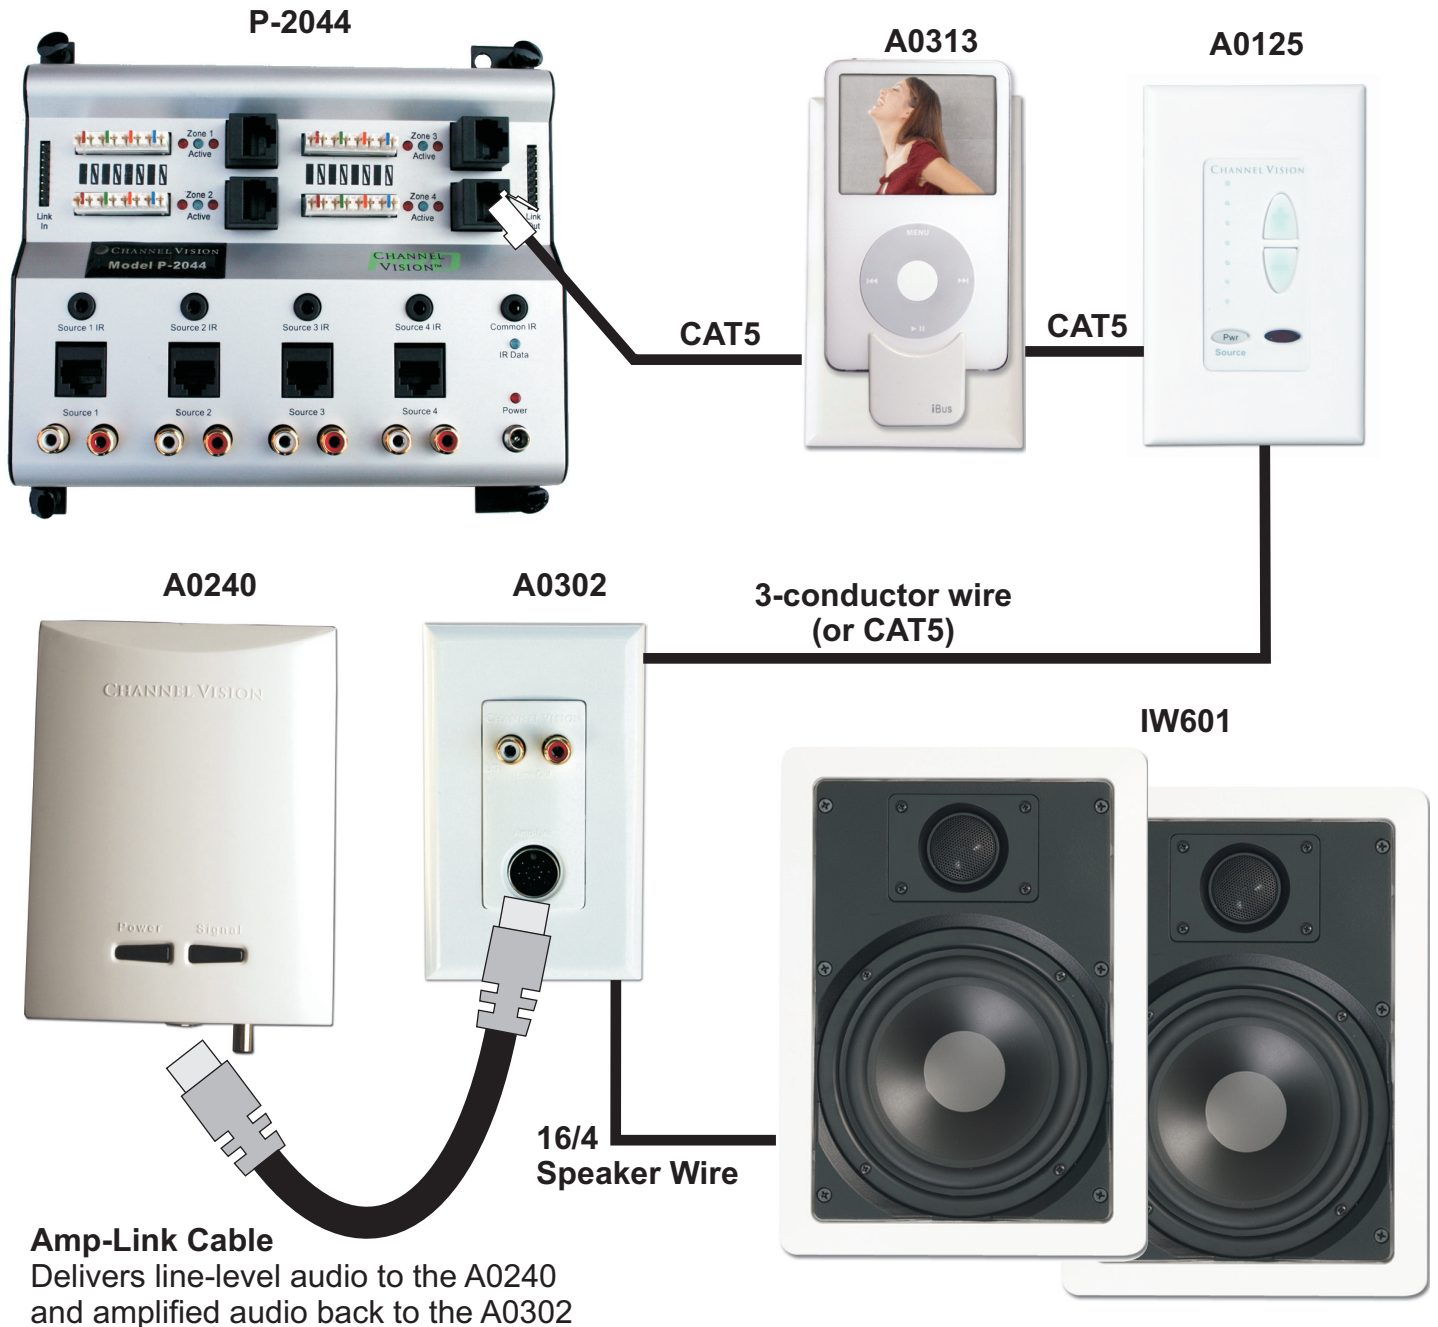

Amp-Link Cable

Delivers line-level audio to the A0240 and amplified audio back to the A0302

CHANNEL VISION™

234 FISCHER AVENUE • COSTA MESA, CA 92626 USA
(714) 424-6500 □ (800) 840-0288 □ (714) 424-6510 fax
www.channelvision.com □ email: sales@channelvision.com