


Opto-Input Adapter /i

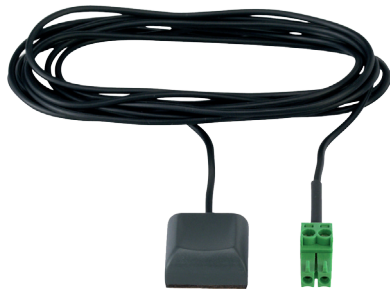

MAIN FEATURES

- Photosensitive cell cable
- Compatible with controllers, touch panel controllers and IP interfaces
- Cable length 2 m

SPECIFICATIONS

Connection

To controller or interface General I/O port
2-pin 3.5 mm connector

Physical

Black plastic photosensitive cell enclosure 18 x 18 x 8 mm
Cable length 2 m / 6.6 ft

Environment conditions


Operating temperature 10° to 40° C
Storage temperature 0° to 60° C
Relative humidity 10% to 90% non-condensing

ORDER INFORMATION

Product code CS0257

DESCRIPTION

Any status indicator on the controlled device can be read using the Opto-Input Adapter /i photosensitive cell. The Opto-Input Adapter /i is fastened on the indicator using a double-sided adhesive tape.

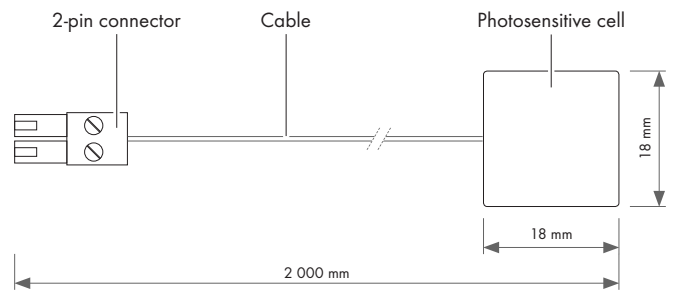

DISTRIBUIDOR EM PORTUGAL



R. Sá de Figueiredo 6 - C
2790-233 Carnaxide
Telef. (+351) 21 417 76 21 ♦ Fax. (+351) 21 030 00 31
Web: www.sislite.pt - email: geral.sislite@sislite.pt