

Designed for the best presentation!


TLS VGA Splitter 1/2



The **VGA splitter 1/2** serves to distribute a VGA input signal on up to 2 monitors or data video projectors.

Technische data:

DDC Mode
Plug + Play
Video band width:
±3dB 550 MHz
Connections:
3x15 pin HD female
Output signal:
0.7 V_{ss} at 75 Ohm
Operating voltage: ±5V

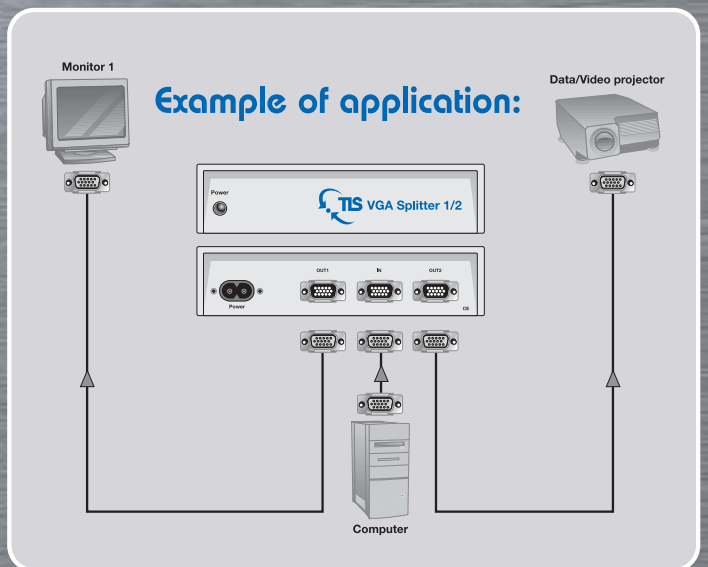

TLS Communication GmbH · Marie-Curie-Straße 20 · 40721 Hilden
Tel.: +49 (0) 2103 / 500 - 60 · Fax: +49 (0) 2103 / 500 - 690 · www.tls-gmbh.com


Designed for the best presentation!

TLS VGA Selector 2/1



The **VGA selector 2/1** is an electronic switch with an automatic input recognition for VGA signals

of 2 different sources on one monitor or on one data video projector.

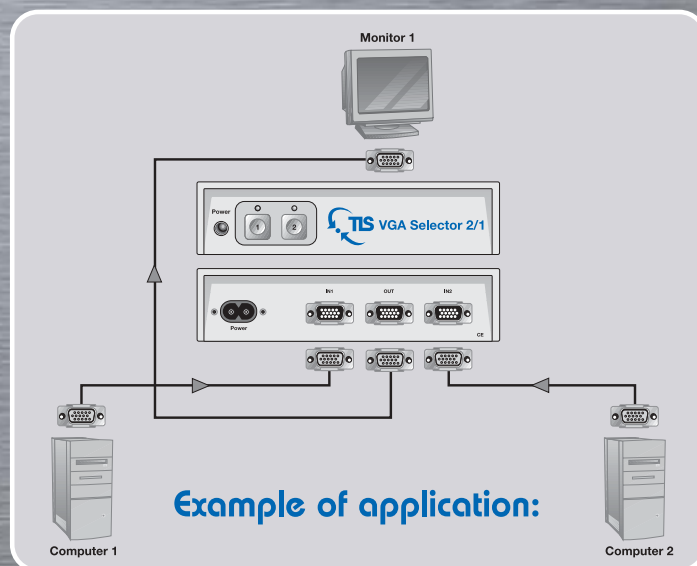

Technical data:

DDC Mode
Plug + Play
Video band width:
 $\pm 3\text{dB}$ 550 MHz
Connections:
3x15 pin HD female
Output signal:
0.7 V_{ss} /75 Ohm
Operating voltage: $\pm 5\text{V}$

More than 20 different variants for each application field!

Distributed by:



R. Sá de Figueiredo 6 – C
2790-233 Carnaxide
Telef. (+351) 21 417 76 21 ♦ Fax. (+351) 21 030 00 31
Web: www.sislite.pt - email: geral.sislite@sislite.pt